
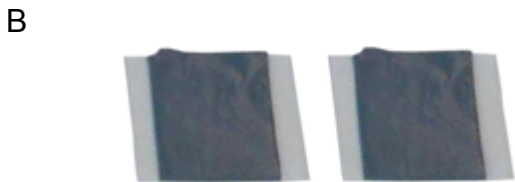


DES-1

End Seal for Self-Regulating Cable

Item	Description	Quantity
A	End Seal	1
B	Mastic Tape 2 Packs	2



Removing the Outer Jacket

- 2" from the cable end, score the circumference of the cable outer jacket. Then score the outer jacket from the previous score toward the cable end. (FIG 1)
- Flex the score points and remove the outer jacket, exposing the inner braid.
- Trim off all braided ground wires back to the outer jacket. (FIG 2)
- Cut a "V" notch in the cable end. (FIG 3)
- Using the mastic piece stretch and wrap the cable end. (FIG 4)
- Slide the shrink end cap over the cable end covering the mastic wrap.
- Heat until completely shrunk, and adhesive escapes the end cap. (FIG 5)



Figure 1



Figure 2



Figure 3



Figure 4



Figure 5

