

SFP-48 Eave Roof Panel

Description

The SnoFree[™] 48" eave roof panel is an efficient method to control any ice dams that would form on a building with an overhang up to 50". With close to 54" of the deck covered, the SFP-48 panel will create all the open area for water to safely flow from the roof without the possibility to refreeze over unheated portions of the roof. The SnoFree™ heated panel system gives an aesthetic look to any structure while keeping a more efficient and cleaner method to eliminate ice dam issues. All SFP systems come standard with a durable 30 year Kynar finish to match most desired looks.

- Effectively controls Ice and Snow with 6 Passes of Cable
- Heats more than 48" up the roof deck
- Comes with a 30 Year protective Kynar finish.
- Sheet metal pieces come in 48" widths for ease of handling.
- · An economical and beautiful option to control ice dams for 48" eve overhangs.
- Svstem Parts List:
 - 4—6" Aluminum Extrusion
 - 1—SFP 24 ga. Kynar Steel Lower Base
 - 1—SFP 24 ga. Kynar Steel Upper Base
 - 1—SFP Cleat Drip Edge
 - 1—SFP 24 ga. Kynar Steel Lower Cap
 - 1—SFP 24 ga. Kynar Steel Upper Cap
 - 1—SFP 24 ga. Kynar Steel Lower Exp. Joint
 - 1—SFP 24 ga. Kynar Steel Upper Exp. Joint

Applications


For all buildings with a pitch greater than 4/12


For new roof installations:

Asphalt Shingle Wood Shake Shingles Tile or Slate Roofs Standing Seam Metal

For installation on existing roofs:

Asphalt Shingle Wood Shake Shingles

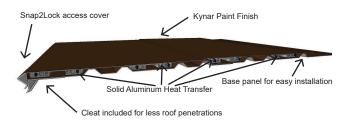

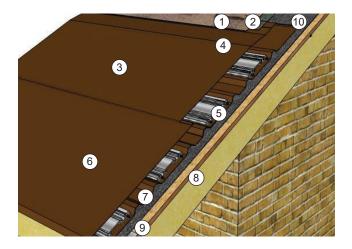

Key Sections

- 1. Chosen Roofing Material
- 2. 12" Strip of Ice & Water Barrier
- 3. Upper SFP-48 Cap
- 4. Upper SFP-48 Base
- 5. 4 6" Extrusion with 6 Passes of cable
- 6. Lower SFP-48 Cap
- 7. Lower SFP-48 Base
- 8. Structural Roof Sheeting
- 9. SFP-Cleat
- 10. Full Roof Water Barrier

