

SFP-12 Eave Roof Panel

Description

The SnoFree™ 12" eave roof panel is an efficient method to control any ice dams that would form on a building with an overhang up to 14". With close to 16" of the deck covered, the SFP-12 panel will create all the open area for water to safely flow from the roof without the possibility to refreeze over unheated portions of the roof. The SnoFree™ heated panel system gives an aesthetic look to any structure while keeping a more efficient and cleaner method to eliminate ice dam issues. All SFP systems come standard with a durable 30 year Kynar finish to match most desired looks.

- Effectively controls Ice and Snow with 2 Passes of Cable
- Heats more than 12" up the roof deck
- Comes with a 30 Year protective Kynar finish.
- Sheet metal pieces come in 48" widths for ease of handling.
- An economical and beautiful option to control ice dams for 12" eave overhangs.
- System Parts List:
 - 1—6" Aluminum Extrusion
 - 1—SFP 24 ga. Kynar Steel Base
 - 1—SFP Cleat Drip Edge
 - 1—SFP 24 ga. Kynar Steel Cap
 - 1—SFP 24 ga. Kynar Steel Expansion Joint

Applications



For all buildings with a pitch greater than 4/12

For new roof installations:

- Asphalt Shingle
- Wood Shake Shingles
- Tile or Slate Roofs
- Standing Seam Metal

For installation on existing roofs:

- Asphalt Shingle
- Wood Shake Shingles

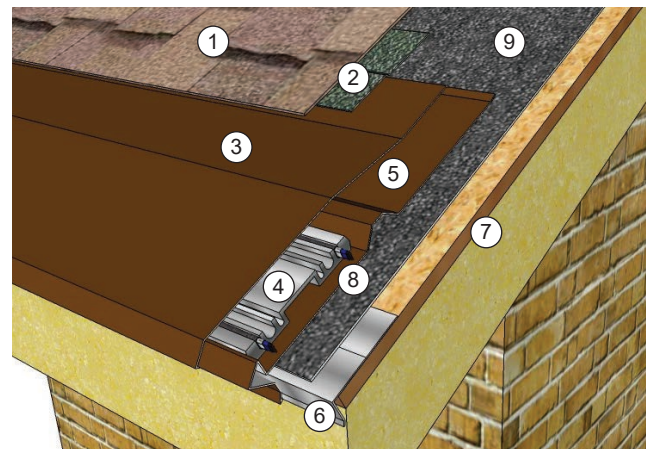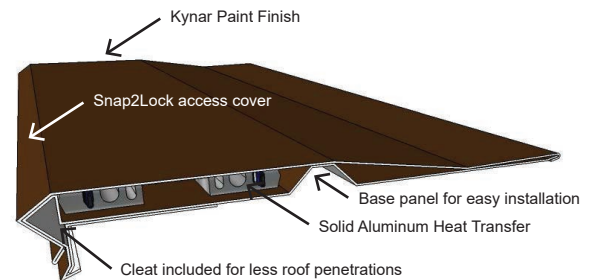

Key Sections

1. Chosen Roofing Material
2. 12" Strip of Ice & Water Barrier
3. SFP-12 Cover
4. 6" Extrusion with 2 Passes of heat cable
5. SFP-12 Base
6. SFP-Cleat
7. Structural Roof Sheeting
8. 2806-R / 6 Watts per Foot Heat Cable
9. Full Roof Water Barrier

