

# SFP-18 Eave Roof Panel

## Description

The SnoFree™ 18" eave roof panel is an efficient method to control any ice dams that would form on a building with an overhang up to 20". With close to 24" of the deck covered, the SFP-18 panel will create all the open area for water to safely flow from the roof without the possibility to refreeze over unheated portions of the roof. The SnoFree™ heated panel system gives an aesthetic look to any structure while keeping a more efficient and cleaner method to eliminate ice dam issues. All SFP systems come standard with a durable 30 year Kynar finish to match most desired looks.

- Effectively controls Ice and Snow with 3 Passes of Cable
- Heats more than 18" up the roof deck
- Comes with a 30 Year protective Kynar finish.
- Sheet metal pieces come in 48" widths for ease of handling.
- An economical and beautiful option to control ice dams for 18" eave overhangs.
- System Parts List:
  - 1—4" Aluminum Extrusion
  - 1—6" Aluminum Extrusion
  - 1—SFP 24 ga. Kynar Steel Base
  - 1—SFP Cleat Drip Edge
  - 1—SFP 24 ga. Kynar Steel Cap
  - 1—SFP 24 ga. Kynar Steel Expansion Joint

## Applications



For all buildings with a pitch greater than 4/12

### For new roof installations:

Asphalt Shingle  
Wood Shake Shingles  
Tile or Slate Roofs  
Standing Seam Metal

### For installation on existing roofs:

Asphalt Shingle  
Wood Shake Shingles

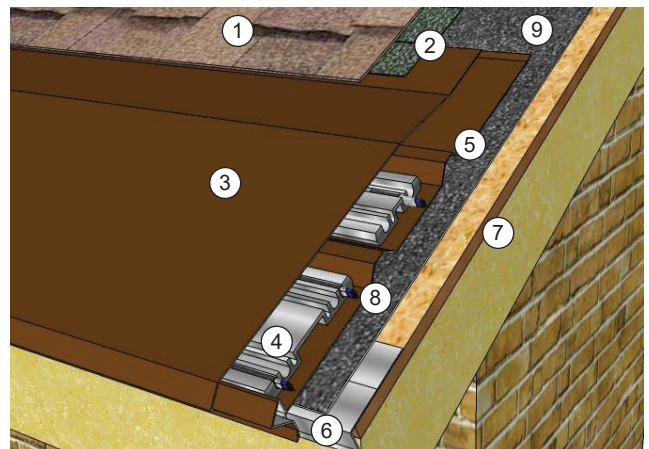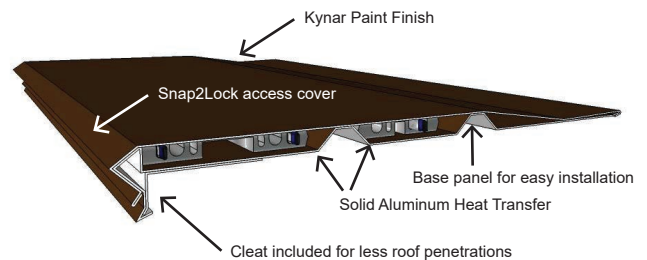

## Key Sections

1. Chosen Roofing Material
2. 12" Strip of Ice & Water Barrier
3. SFP-18 Cover
4. 6" Extrusion with 2 Passes of heat cable and a 4" Extrusion with 1 pass of heat cable
5. SFP-18 Base
6. SFP-Cleat
7. Structural Roof Sheeting
8. 2806-R / 6 Watts per Foot Heat Cable
9. Full Roof Water Barrier

